


24Mt IMO1 Rated Bitutainer™
 Model TR-T-778
 (For Direct Fire Heating)



Suitable for Storage and Fully Intermodal for Transportation of Hot Liquid Bitumen, Emulsions, Light and Heavy Fuel Oils

Fully IMDG Compliant with ADR/RID, US DOT/TC

- Nominal Capacity 25,000 Litres
- ISO 1496 Part 3 - Type 75 "Tank Containers"
- Inner Vessel Pressure Tested to 4bar
- High Performance factory fitted heating tubes
- Baffled design allows Partial Payloads to be carried
- High Value Factory Installed Insulation and Pressed Corten Steel Outer Skin
- Fully Framed with Corner Twist Locks with Damage Reinforcement Plates
- UN Coded T3 (IMO1 rated) Tank Container with Lloyds Approval
- Range of bitumen handling equipment available including pumps and hoses

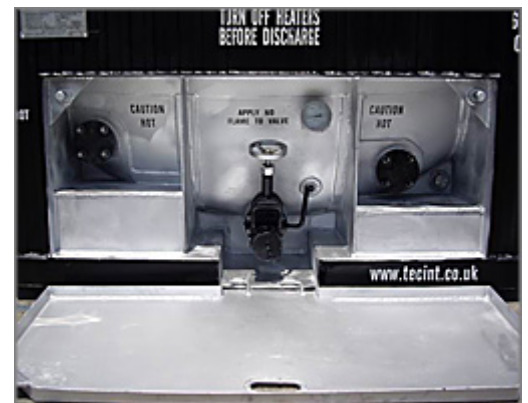

Heating equipment required:
 Quick Fit Diesel Burner Set
 Stainless Steel Flame Liners

Ratings:
 Max GW 30,000 Kgs
 Payload 24,000 Kgs
 Tare Wt. <6,000 Kgs

Measures:
 Length 6058mm (20')
 Width 2438mm (8')
 Height 2591 mm (8'6")