


20Mt IMO1 Rated Bitutainer™ Model TR-T-878 (For Direct Fire Heating)



Suitable for Storage and Fully Intermodal for Transportation of Hot Liquid Bitumen, Emulsions, Light and Heavy Fuel Oils

Fully IMDG Compliant with ADR/RID, US DOT/TC

- Nominal Capacity 21,000 Litres
- ISO 1496 Part 3 - Type 75 "Tank Containers"
- Inner Vessel Pressure Tested to 4bat
- Twin High Performance factory fitted heating tubes
- Baffled design allows Partial Payloads to be carried
- High Value Factory Installed Insulation and Pressed Corten Steel Outer Skin
- Fully Framed with Corner Twist Locks with Damage Reinforcement Plates
- Transported as a Standard 20ft ISO Tank Container with Lloyds Approval
- Range of bitumen handling equipment available including pumps and hoses

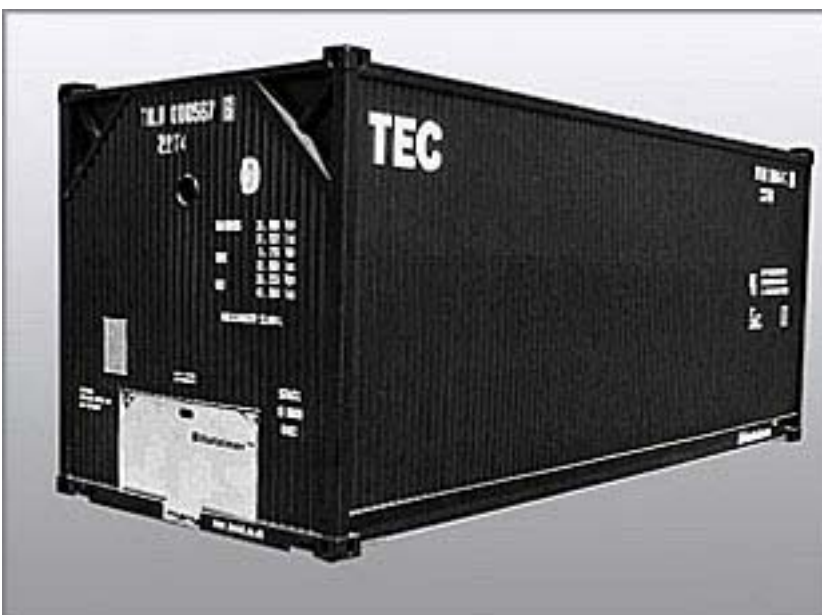

Heating equipment required:
Quick Fit Diesel Burner Set
Stainless Steel Flame Liners

Ratings:
Max GW 26,000 Kgs
Payload 20,100 Kgs
Tare Wt. <5,900 Kgs

Measures:
Length 6058mm (20')
Width 2438mm (8')
Height 2591 mm (8'6")